


## Parallel (Speaker cable)

O.F.C. parallel loudspeaker cable. High flexibility.

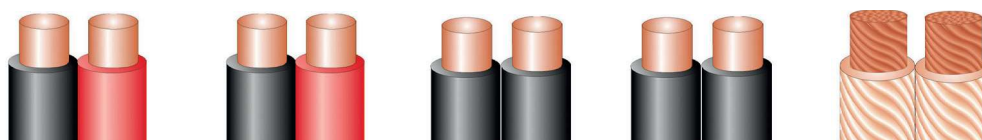

TECHNICAL DATA	SK 207	SK 214	PF 567	PF 549	SK 2115
N. of conductors	2	2	2	2	2
Conductor	Cu OFC	Cu OFC	Cu	Cu	Cu OFC
Galga - AWG	20	16	16	12	16
Stranding	15/31	28/30	189/38	380/0,10	3/28/34
Section (mm <sup>2</sup> )	0,7	1,5	1,5	3	1,5
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	-	-	-	-	-
Nominal size	2 x 4,30	2,5 x 5,0	3,40 x 6,40	4,80 x 9,0	3,1 x 6,5
Weight Kg	22	49	49	96	50
Colors					Transp.
Jacket	PTC	PTC	PTC	PTC	PTC
Use	Install	Install	Mobile	Mobile	Install

\* other options available please ask



TECHNICAL DATA	SK 2125	SK 2140	SK 2160	SK 15	SK 25
N. of conductors	2	2	2	2	2
Conductor	Cu OFC	Cu OFC	Cu OFC	CCA	CCA
Galga - AWG	14	12	10	16	14
Stranding	7/20/34	7/18/32	7/28/32	46/32	49/30
Section (mm <sup>2</sup> )	2,5	4	6	1,5	2,5
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	-	-	-	-	-
Nominal size	3,8 x 8,6	4,6 x 9,6	6,3 x 12,6	3,0 x 6,0	3,60 x 6,20
Weight Kg	70	100	162	20	30
Colors	Transp.	Transp.	Transp.	Transp.	Transp.
Jacket	PTC	PTC	PTC	PTC	PTC
Use	Install	Install	Install	Install	Install

\* other options available please ask

## Jacketed braided shielded AL

Balanced coaxial cable for speakers. 100 Volt cable for professional use. It is a cable specially manufactured to be used in speaker installations with 100 Volt lines. SZ cover. Euroclass Fca according to EN50575



TECHNICAL DATA	SZ 215	SZ 225	SZ 240	SZ 260 HF
N. of conductors	2	2	2	2
Conductor	Cu	Cu OFC	Cu OFC	Cu
Galga - AWG	16	14	12	10
Stranding	27/30	44/30	72/30	72/28
Section (mm <sup>2</sup> )	1,5	2,5	4	6
Insulation	FRLSZH	FRLSZH	FRLSZH	FRLSZH
Shield	-	-	-	-
Nominal size	5,15	7	8,9	10
Weight Kg	45	75	145	200
Colors	●	●	●	●
Jacket	FRLSZH	FRLSZH	FRLSZH	FRLSZH
Use	Install	Install	Install	Install

\* other options available please ask

## Braided with sheath and shielded AL type SZ

Analogue shielded balanced loudspeaker audio cable. Specially manufactured to be used in loudspeaker and 100 volt line installations.



TECHNICAL DATA	SZ 215 AL	SZ 225 AL	SZ 240 AL	SZ 425 AL
N. of conductors	2	2	2	4
Conductor	Cu	Cu	Cu	Cu OFC
Galga - AWG	16	14	12	14
Stranding	27/30	44/30	72/30	44/30
Section (mm <sup>2</sup> )	1,5	2,5	4	2,5
Insulation	XLPE	XLPE	XLPE	FRLSZH
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	5,15	6,15	7,4	8,5
Weight Kg	48	78	148	150
Colors	●	●	●	●
Jacket	FRLSZH	FRLSZH	FRLSZH	FRLSZH
Use	Install	Install	Install	Install

\* other options available please ask

# Jacketed balanced unshielded

Balanced unshielded analog audio cable for speakers. It is a cable specially manufactured to be used in speaker installations and 100 Volt lines.



TECHNICAL DATA	SP 205	SP 210	SP 215	SP 222	SP 225
N. of conductors	2	2	2	2	2
Conductor	Cu	Cu	Cu	Cu	Cu
Galga - AWG	20	18	16	14	14
Stranding	16/32	32/32	28/30	43/30	48/30
Section (mm <sup>2</sup> )	0,5	1	1,5	2,2	2,5
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	-	-	-	-	-
Nominal size	5,8	7	9	9,4	9,7
Weight Kg	52	63	77	105	112
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* other options available please ask



TECHNICAL DATA	SP 240	SP 260	SP 405	SP 410	SP 415
N. of conductors	2	2	4	4	4
Conductor	Cu	Cu	Cu	Cu	Cu
Galga - AWG	12	10	20	18	16
Stranding	52/28	78/28	16/32	32/32	28/30
Section (mm <sup>2</sup> )	4	6	0,5	1	1,5
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	-	-	-	-	-
Nominal size	11,75	12,3	6,6	7,5	9,12
Weight Kg	181	230	60	140	125
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## Jacketed balanced unshielded



TECHNICAL DATA	SP 425	SP 440	SP 615	SP 825	SP 840
N. of conductors	4	4	6	8	8
Conductor	Cu	Cu	Cu	Cu	Cu
Galga - AWG	14	12	16	14	12
Stranding	48/30	52/28	28/30	48/30	56/28
Section (mm <sup>2</sup> )	2,5	4	1,5	2,25	4
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	-	-	-	-	-
Nominal size	10	12	11,8	12,6	17,5
Weight Kg	179	267	135	330	535
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC	PTC	PTC
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## Jacketed braided unshielded PREMIUM

Balanced coaxial audio cable for speakers, 100 Volt cable for professional use. It is a cable specially manufactured for use in speaker installations with 100 volt lines. Extra flexible copper rope. Euroclass ECA according to EN50575.



TECHNICAL DATA	SP 215 PREMIUM	SP 225 PREMIUM	SP 240 PREMIUM	SP 415 PREMIUM
N. of conductors	2	2	2	4
Conductor	Cu	Cu	Cu	Cu
Galga - AWG	16	14	12	16
Stranding	84/34	140/34	4/32/32	84/34
Section (mm <sup>2</sup> )	1,5	2,5	4	1,5
Insulation	PTC	PTC	PTC	PTC
Shield	-	-	-	-
Nominal size	7,5	8,2	11	8,6
Weight Kg	77	112	181	125
Colors	●	●	●	●
Jacket	PTC/NBR	PTC/NBR	PTC/NBR	PTC/NBR
Use	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## Jacketed braided unshielded PREMIUM



TECHNICAL DATA	SP 425 PREMIUM	SP 440 PREMIUM	SP 840 PREMIUM
N. of conductors	4	4	8
Conductor	Cu	Cu	Cu
Galga - AWG	14	12	12
Stranding	27/30	44/30	72/30
Section (mm <sup>2</sup> )	2,5	4	4
Insulation	PTC	PTC	PTC
Shield	-	-	-
Nominal size	10,2	12,4	17,5
Weight Kg	179	267	535
Colors	●	●	●
Jacket	PTC/NBR	PTC/NBR	PTC/NBR
Use	Mobile	Mobile	Mobile

\* other options available please ask

## AL - Shielded multicore twisted (AS)

Analogue shielded balanced loudspeaker audio cable. Specially manufactured to be used in loudspeaker and 100 volt line installations, Retard system. Mobile phone interference cancellation.



TECHNICAL DATA	AL 205	AL 207	AL 210	AL 215	AL 225
N. of conductors	2	2	2	2	2
Conductor	CuSn OFC	CuSn OFC	CuSn OFC	CuSn OFC	CuSn OFC
Galga - AWG	20	19	18	16	14
Stranding	16/32	24/32	32/32	28/30	48/30
Section (mm <sup>2</sup> )	0,5	0,75	1	1,5	2,5
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	5,6	6,5	6,29	7,25	9
Weight Kg	35	50	65	95	121
Colors	●	●	●	●	●
Jacket	FRLSZH, PTC	PTC, FRLSZH	PTC, FRLS, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* consultar otras opciones disponibles

## AL - Shielded multicore twisted (AS)



TECHNICAL DATA	AL 240	AL 260	AL 280	AL 1012	AL 1016
N. of conductors	2	2	2	2	2
Conductor	Cu	Cu	Cu	Cu	Cu
Galga - AWG	12	10	8	6	5
Stranding	52/28	78/28	240/32	7/40/32	120/26
Section (mm <sup>2</sup> )	4	6	8	12	16
Insulation	PTC	PTC	PTC	PTC	PTC
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	11,5	12,5	14,2	16,5	18,58
Weight Kg	190	236	285	345	583
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	FRLSZH	PTC, FRLSZH	PTC
Use	Mobile	Mobile	Mobile	Mobile	Mobile


\* other options available please ask



TECHNICAL DATA	AL 305	AL 310	AL 315	AL 325
N. of conductors	3	3	3	3
Conductor	CuSn OFC	CuSn OFC	CuSn OFC	CuSn OFC
Galga - AWG	20	18	16	14
Stranding	16/32	32/32	28/30	48/30
Section (mm <sup>2</sup> )	0,5	1	1,5	2,5
Insulation	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	7	7,8	8,54	9,7
Weight Kg	65	79	102	147
Colors	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## AL - Shielded multicore twisted (AS)

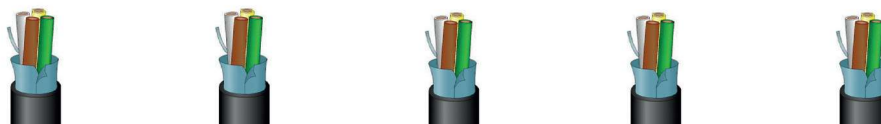

TECHNICAL DATA	AL 405	AL 410	AL 415	AL 425	AL 440
N. of conductors	4	4	4	4	4
Conductor	CuSn OFC	CuSn OFC	CuSn OFC	CuSn OFC	CuSn OFC
Galga - AWG	20	18	16	14	12
Stranding	16/32	32/32	28/30	48/30	52/28
Section (mm <sup>2</sup> )	0,5	1	1,5	2,5	4
Insulation	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Shield	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire
Nominal size	5,55	7,28	8,6	11	13,2
Weight Kg	60	150	125	175	298
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* other options available please ask



TECHNICAL DATA	AL 460	AL 480	AL 510	AL 605	AL 615
N. of conductors	4	4	5	6	6
Conductor	Cu	Cu	CuSn OFC	CuSn OFC	CuSn OFC
Galga - AWG	10	8	18	20	16
Stranding	82/28	240/32	32/32	16/32	28/30
Section (mm <sup>2</sup> )	6	8	1	0,5	1,5
Insulation	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Shield	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet +Drain Wire
Nominal size	15	17,5	11,05	6,64	8,5
Weight Kg	340	495	120	92	135
Colors	●	●	●	●	●
Jacket	PTC, FRLSZH	PTC	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## AL - Shielded multicore twisted (AS)



TECHNICAL DATA	AL 625	AL 640	AL 825	AL 840
N. of conductors	6	6	8	8
Conductor	CuSn OFC	Cu	Cu	Cu
Galga - AWG	14	12	14	12
Stranding	48/30	52/28	48/30	52/28
Section (mm <sup>2</sup> )	2,5	4	2,5	4
Insulation	PTC	PTC	PTC	PTC
Shield	Al-Pet +Drain Wire	Al-Pet +Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	13,34	16,2	15	18,2
Weight Kg	280	285	330	535
Colors	●	●	●	●
Jacket	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH	PTC, FRLSZH
Use	Mobile	Mobile	Mobile	Mobile

\* other options available please ask

## AL - Shielded multicore twisted fire resistant

Analogue shielded balanced loudspeaker audio cable. Retard system. Mobile phone interference cancellation. Fire resistant 180 minutes (AS+, RF90). Cable designed for installations that require specific fire safety. UNE-EN50200 compliant.





TECHNICAL DATA	AL 205 FIRE	AL 215 FIRE	AL 225 FIRE	AL 240 FIRE
N. of conductors	2	2	2	2
Conductor	Cu	Cu	Cu	Cu
Galga - AWG	20	16	14	12
Stranding	16/30	28/30	48/30	52/28
Section (mm <sup>2</sup> )	0,5	1,5	2,5	4,0
Insulation	XLS	XLS	XLS	XLS
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	5,6	8	9,4	11
Weight Kg	35	100	128	140
Colors	●	●	●	●
Jacket	FRLSZH	FRLSZH	FRLSZH	FRLSZH
Use	Install	Install	Install	Install

\* other options available please ask



## AL - Shielded multicore twisted fire resistant



TECHNICAL DATA	AL 315 FIRE	AL 325 FIRE	AL 425 FIRE
N. of conductors	3	2	4
Conductor	Cu	Cu	Cu
Galga - AWG	16	14	14
Stranding	28/30	52/28	48/30
Section (mm <sup>2</sup> )	1,5	2,5	2,5
Insulation	XLS	XLS	XLS
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	Al-Pet + Drain Wire
Nominal size	8,2	9,70	11
Weight Kg	107	154	220
Colors	●	●	●
Jacket	FRLSZH	FRLSZH	FRLSZH
Use	Install	Install	Install

\* other options available please ask

## Active audio

Special cables composed by audio and power. Designed for self amplified loudspeakers installations.



TECHNICAL DATA	TVL 0110		TVL 0210	
	AK 220 AL	Electric Cable	Electric Cable	AK 2111 AL
N. of conductors	1	1	3	2
Conductor	Cu OFC	CuSn	Cu	CuSn
Galga - AWG	24	2x16 + 1x20	14	24
Stranding	25/38	28/30 + 16/32	80/32	7/32
Section (mm <sup>2</sup> )	0,2	2x1,5 + 1x0,5	2,5	0,22
Insulation	PTC	FRLSZH	FRLSZH	PEX
Shield	Al-Pet + Drain Wire	Al-Pet + Drain Wire	-	Al-Pet + Cu
Nominal size	16		13,5	
Weight Kg	322		216	
Colors	●		●	
Jacket	FRLSZH		FRLS, FRLSZH	
Use	Mobile		Mobile	

\* other options available please ask